
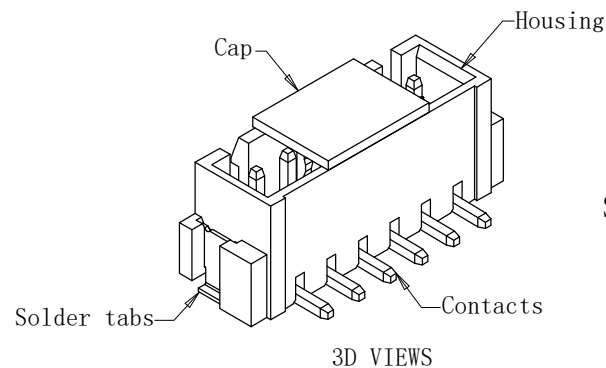
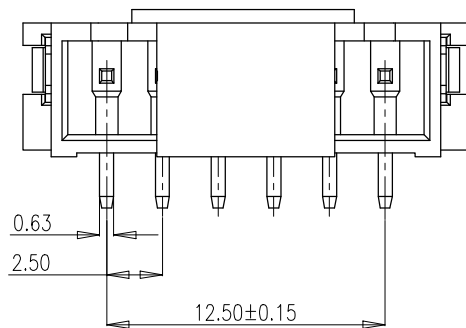




RoHS

REV.	ECN NO.	APPD.
A	ECN230216-006	Simon Mou
B	ECN230224-001	Simon Mou
C	ECN230609-005	Simon Mou

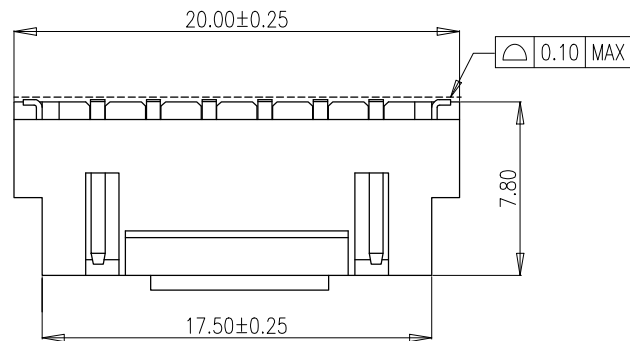

Specifications:

1. Contact resistance: $\leq 20m\Omega$;
2. Insulation resistance: $\geq 1000M\Omega$;
3. Rated voltage: 250V AC DC;
4. Rated current: 3.0A AC DC;
5. Withstand voltage: 1000V AC/minute;
6. Temperature range: $-25^{\circ}C \sim +105^{\circ}C$;
7. Housing: LCP, UL94 V-0, Natural;
8. Cap: LCP, UL94 V-0, Natural;
9. Contacts: Brass/Sn;
10. Solder tabs: Phosphor Bronze/Sn.

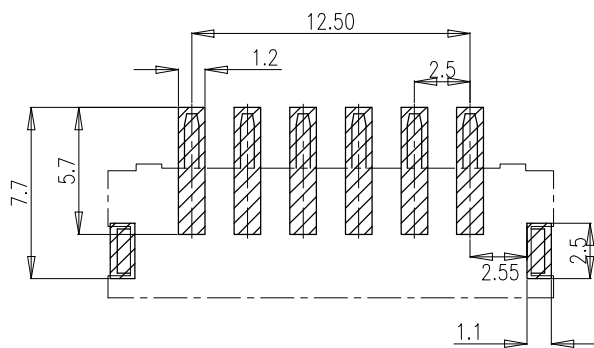

RECOMMENDED PCB LAYOUT

TOLERANCES UNLESS OTHERWISE SPECIFIED		UNITS	COCENTRA [®] 科信成精密技术 (江苏) 有限公司 COCENTRA PRECISION TECHNOLOGY (JIANGSU) Co. LTD			
X.± 0.30	X.*± 5°	MAT'L	DWG NAME: CUSTOMER DRAWING		TITLE: 2.50mm Disconnect table crimp style Wafer_6PIN(卡扣结构)	
.X± 0.25	.X*± 3°	NA	APPD: Simon Mou 2023/06/09		PART NO.: PHMR1064-2	
.XX± 0.15	.XX*± 2°	FINISH	CKD: David Wang 2023/06/09		DWG NO.: 301-0000-0379	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PRIOR WRITTEN CONSENT OF COCENTRA PRECISION TECHNOLOGY (JIANGSU) Co. LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF COCENTRA PRECISION TECHNOLOGY (JIANGSU) Co. LTD.		Q'TY	DR: BJ. Wang 2023/06/09		SCALE	SHEET
		NA			1:1	1/1
						REV.
						C