


CABLE ASSEMBLY

RoHS 2.0

Rev.	ECN No.	DESCRIPTION
A	ECN200302-001	NEW RELEASE

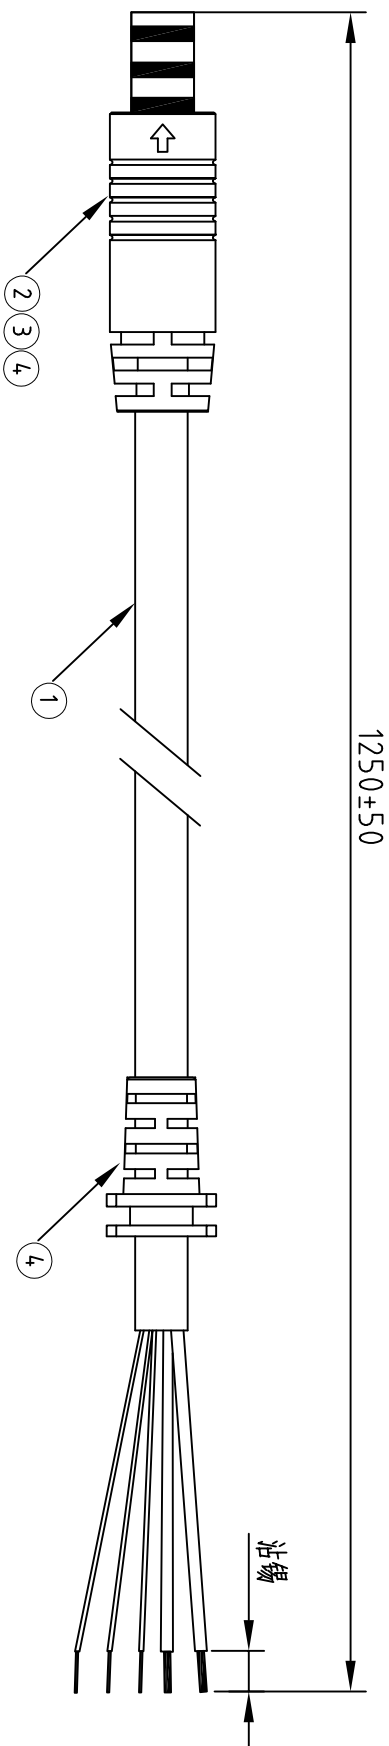

DC五级连接器

- 注意事项:
1. 外观: 表面光滑, 无划痕, 毛边, 脏污等缺陷;
  2. 机械性能: 插拔力  $1kgf \leq F \leq 6kgf$
  3. 导通测试规格: 导通阻抗:  $3\Omega$ ; 绝缘阻抗: DC 500V/100M $\Omega$ , 高压: AC 500V, 漏电流: 1mA, 0.1sec;
  4. S.R.表面不可有缩水、不饱模、杂色等不良;
  5. 此零件所包含环境管理物质应符合科信成系统文件QW-QA-10之规定.

④	91204-B502-0001	成型原料	PVC 50P 黑色
③	91208-S001-0002	成型原料	LDPE 颜色: Nature
②	030-0001-0175	连接器	DC POWER JACK PLUG
①	91003-B001-0036	多芯线	18AWG*2C*26AWG*3C OD: 6.8mm 黑色
料号	料号	品名	规格

TOLERANCES UNLESS OTHERWISE SPECIFIED		SERIES: WIRE HARNESS		TITLE: DC8006五级连接器线束	
X.	/	X.°	/	APPD: CXR	PART No.: CW-088-A4,80
.X	±0.20	.X°	±1°	DR: MH	DWG No.: 307-0000-E360
.XX	±0.10	.XX°	±0.5°	UNITS: MM	SCALE: 1:1
THESE DRAWINGS AND SPECIFICATIONS ARE THE PRIOR WRITTEN CONSENT OF COCENTRA PRECISION TECHNOLOGY (JIANGSU) Co. LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF COCENTRA PRECISION TECHNOLOGY (JIANGSU) Co. LTD.					
COCENTRA 科信成精密技术 (江苏) 有限公司		COCENTRA PRECISION TECHNOLOGY (JIANGSU) Co. LTD.		SHEET 1/1	

1 2 3 4 5 6 7 8