



Rev.	ECN No.	DESCRIPTION
A	ECN220616-003	NEW RELEASE

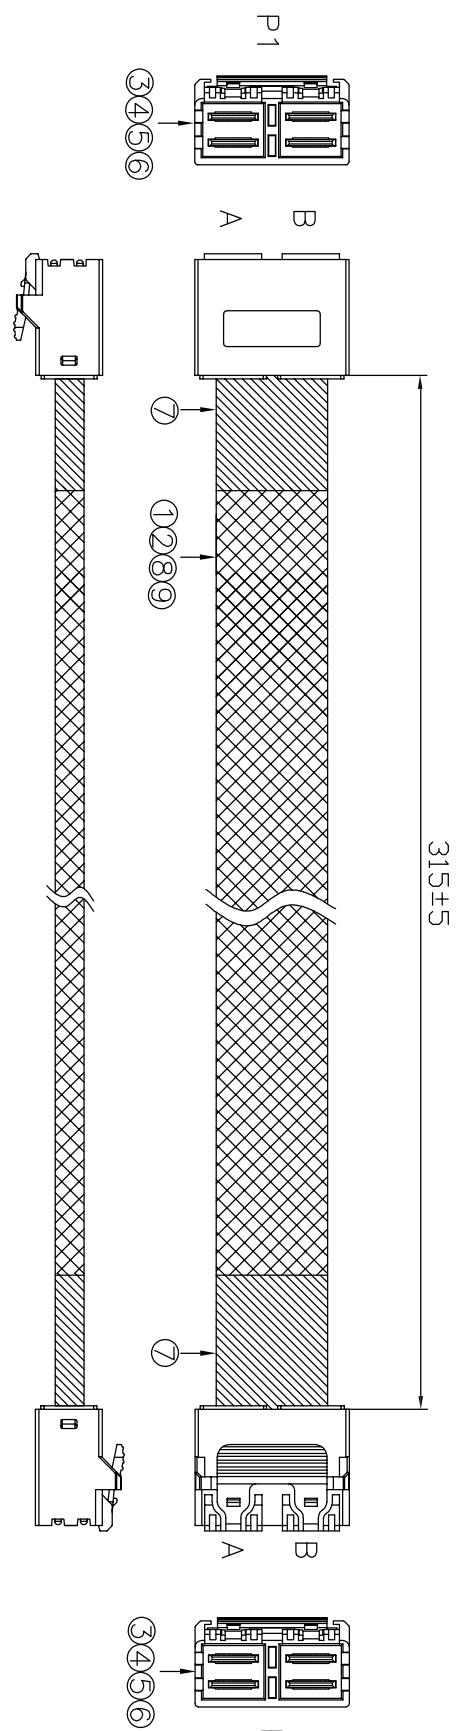

- 技术要求:
1. 100%测试: 短路、开路、错位以及间歇性接触不良;
 导通阻抗: MAX 2Ω
 绝缘阻抗: MIN 10MΩ
 直流耐压: DC/300V/0.01S;
 2. 所有材料需符合ROHS标准.
 3. 此零件所包含环境管理物质应符合科信成系统文件QW-QA-10之规定.

客户料号:

⑨	屏蔽布	屏蔽胶带 W=35mm
⑧	编织网管	编织网管 φ12.0 黑色
⑦	屏蔽布	屏蔽胶带 W=25mm
⑥	后塞	BACK COVER PA66+30%GF 黑色
⑤	HSG 外壳	HSG, PA66 黑色 23.85×13.28×18mm
④	PCB	PCB, 8643 4i SHORT PCB, 85 ohm
③	成型原料	热熔胶粒 自然色
②	电子线	30AWG 电子线 黑色 OD:0.80mm
①	多芯线	CALLE.30AWG×2C+2D+HA+HM, Black 85±5 Ω
标号	名称	规格

TOLERANCES UNLESS OTHERWISE SPECIFIED		科信成精密技术 (江苏) 有限公司 COCENTRA PRECISION TECHNOLOGY (JIANGSU) Co. LTD	
.X	±0.20	X.°	±2°
.XX	±0.10	X.°	±1°
.XXX	±0.05	.XX.°	±0.5°
THESE DRAWINGS AND SPECIFICATIONS ARE THE PRIOR WRITTEN CONSENT OF COCENTRA PRECISION TECHNOLOGY (JIANGSU) Co. LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF COCENTRA PRECISION TECHNOLOGY (JIANGSU) Co. LTD.			
SERIES: HD 8i CABEL ASS'Y		TITLE: SFF 8643 MINI SAS HD 8i CABEL ASS'Y	
APPD: CXR 2022/06/16		PART No.: CW-117-A926	
DR: ZCM 2022/06/16		DWG No.: 307-0000-G872	
UNITS	MAT'L	FINISH	SCALE
MM	N/A	N/A	1:1
SHEET			REV.
1/2			A

