


CABLE ASSEMBLY

Rev.	ECN No.	DESCRIPTION	DAT
A	ECN220611-030	NEW RELEASE	2022/06/11

CN1端①
DF56L-26P-0.3SD(51)
连接器金手指面朝下
1: 连接器正面卡点处需加锡焊接。
2: 沿Conn下边缘双面点胶, 点胶宽度
MAX0.7mm, 长MAX9.5mm.

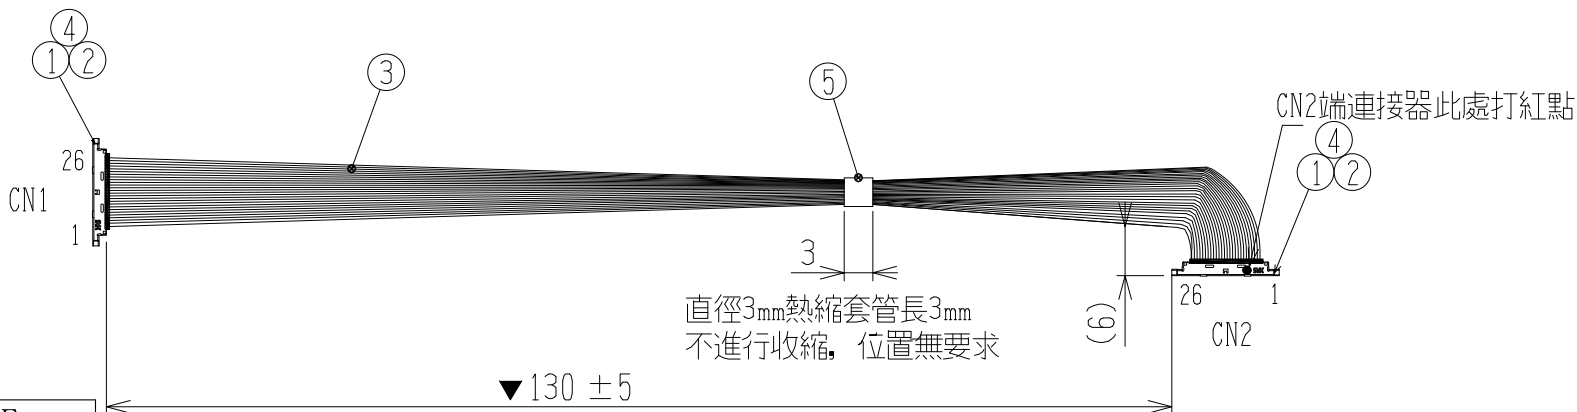

CN2端①
DF56L-26P-0.3SD(51)
连接器金手指面朝下
1: 连接器正面卡点处需加锡焊接。
2: 沿Conn下边缘双面点胶, 点胶宽度
MAX0.7mm, 长MAX9.5mm.

PIN ASSIGNMENT

CN1	CN2	CABLE
1	26	46# coaxial 黑
2	25	46# coaxial 黑
3	24	46# coaxial 黑
4	23	46# coaxial 黑
5	22	46# coaxial 黑
6	21	46# coaxial 黑
7	20	46# coaxial 黑
8	19	46# coaxial 黑
9	18	46# coaxial 黑
10	17	46# coaxial 黑
11	16	46# coaxial 黑
12	15	46# coaxial 黑
13	14	46# coaxial 黑
14	13	46# coaxial 黑
15	12	46# coaxial 黑
16	11	46# coaxial 黑
17	10	46# coaxial 黑
18	9	46# coaxial 黑
19	8	46# coaxial 黑
20	7	46# coaxial 黑
21	6	46# coaxial 黑
22	5	46# coaxial 黑
23	4	46# coaxial 黑
24	3	46# coaxial 黑
25	2	46# coaxial 黑
26	1	46# coaxial 黑

- 注意:
- 100%导通测试, 不可有接触不稳定, 断路, 短路, 错PIN等不良现象。
 - 电气测试规格:
导通阻抗: 3ΩMax.
绝缘阻抗: DC200V, 10MΩ;
耐压测试: AC100V, 0.5mA;
瞬断测试: 时间1S
 - 标“▼”为重点管控尺寸;
 - 使用的材料须符合RoHS 2.0环保要求;

5	TUBE	黑色热缩套管 φ3	1	
4	GLUE	uv胶		
3	Coaxial	46#同轴线 50Ω 漆黑色	26	
2	SHELL	DF56-26P-SHL	2	
1	CONN	DF56L-26P-0.3SD(51)	2	
NO.	SORT	DESC. & VENDOR P/N	Q'ty	VENDOR

TOLERANCES UNLESS OTHERWISE SPECIFIED				CUSTOMER P/N:					
0-30	±3	0-30°	±1°	COCENTRA 科信成精密技术(江苏)有限公司 COCENTRA PRECISION TECHNOLOGY (JIANGSU) Co. LTD.					
31-100	±5	31-90°	±3°						
100-200	±8	91-360°	±5°						
>200	±10								
SERIES:				TITLE:					
APPD:				PART No.:					
CKD:				DWG No.:					
DR:									
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KUNSHAN COCENTRA ELECTRONICS CO.,LTD. AND SHALL NOT BE REPRODUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF KUN SHAN COCENTRA ELECTRONICS CO.,LTD.				UNITS	MAT'L	FINISH	SCALE	SHEET	REV.
				MM	N/A	N/A	N/A	1/1	A