


CN1端	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
CN2端	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1
AWG	40#	40#	40#	40#	40#	40#	40#	40#	40#	40#	40#	40#	40#	40#	40#	40#	40#	40#	40#	40#	40#	40#	40#	40#	40#	40#	40#	40#	40#	
颜色	蓝	蓝	蓝	蓝	蓝	蓝	蓝	蓝	蓝	蓝	蓝	蓝	蓝	蓝	蓝	蓝	蓝	蓝	蓝	蓝	蓝	蓝	蓝	蓝	蓝	蓝	蓝	蓝	蓝	蓝

CN1端  
I-PEX 20453-030T-03  
1:连接器金手指面朝上  
2:连接器正面卡点处需加锡焊接.  
3:沿Conn下边缘双面点胶, 点胶宽度Max2mm.胶高度不可超出铁壳平面.

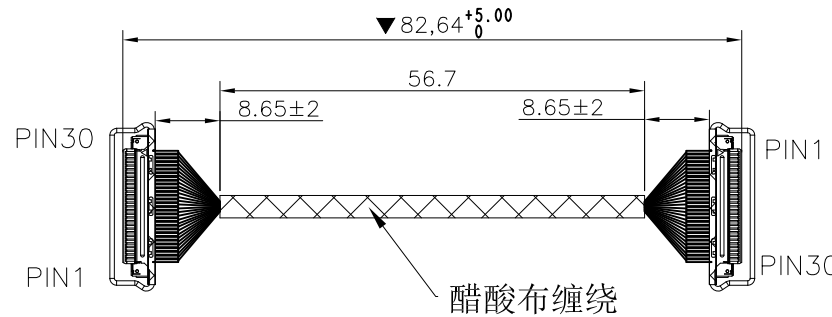

CN2端  
I-PEX 20453-030T-03  
1:连接器金手指面朝上.  
2:连接器正面卡点处需加锡焊接.  
3:沿Conn下边缘双面点胶, 点胶宽度Max2mm.胶高度不可超出铁壳平面.

技术要求:

- 100%测试, 短路/开路/错位以及间歇性接触不良.  
导通阻抗: 3欧姆  
绝缘阻抗: 10M欧姆  
直流耐电压/测试时间: DC200V/0.01S  
交流耐电压/测试时间: AC100V/0.01S  
漏电流最大0.5mA, 瞬断2S.
- 醋酸布之间搭接不可露线.
- 标有“▼”的尺寸需做重点检验.
- 此零件所包含环境管理物质应符合科信成系统文件QW-QA-10之规定.
- 填充示意图:



3	Acetate Tape	Acetate tape W10*T=0.08mm	1
2	Wire	UL1354 40# OD:0.35MM 50Ω 蓝 Coaxial cable	30
1	CN1/CN2 COON	I-PEX 20453-030T-03	2
NO	MATRIAL	MATRIAL SPFCIFICATION	O'TY
CUSTOMER:		CUSTOMER P/N:	
TOLERANCES UNLESS OTHERWISE SPECIFIED		科信成精密技术(江苏)有限公司 COCENTRA PRECISION TECHNOLOGY (JIANGSU) Co., LTD.	
50-100	±3	X	±0.5°
101-300	±5	X.X	±0.1°
301-500	±8		
501-1000	±10		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KUNSHAN COCENTRA ELECTRONICS CO.,LTD. AND SHALL NOT BE REPRODUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF KUN SHAN COCENTRA ELECTRONICS CO.,LTD.		SERIES: APPD: CKD: DR:	TITLE: LCD LINE ASSY 30PIN TO 30PIN L=82.64MM PART No.: CACC082-018 DWG No.: 307-0000-S502
	UNITS	MAT'L	FINISH
MM	N/A	N/A	N/A
	SCALE	SHEET	REV.
	N/A	1/1	A