


零件图

RoHS 2.0+HF

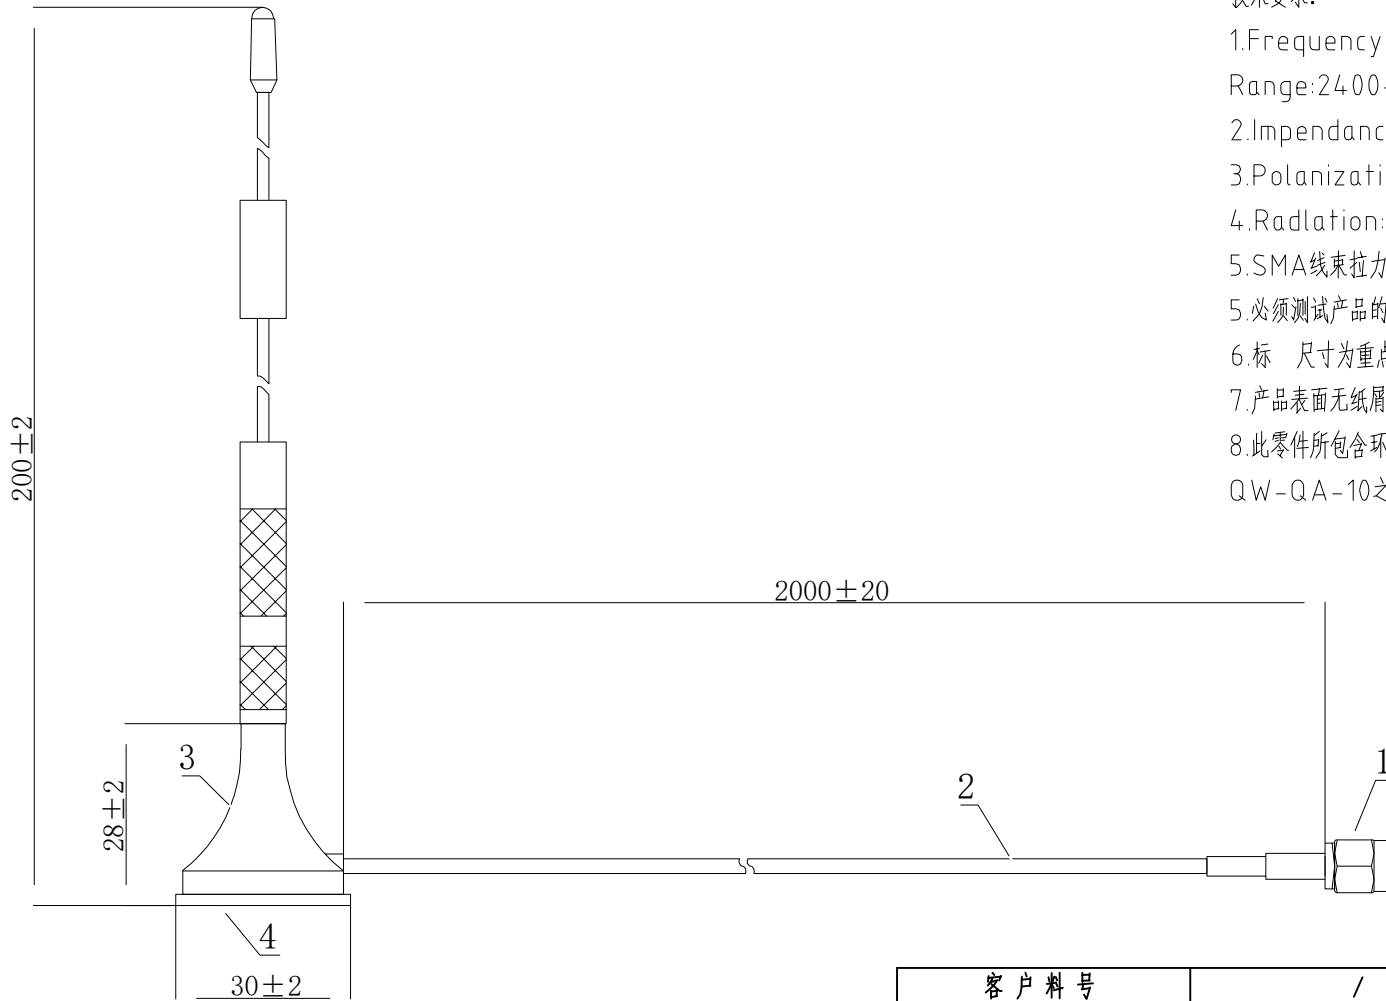

技术要求:

1. Frequency
Range: 2400-2500/5000-5800MHz
2. Impedance: 50Ω
3. Polarization: Vertical
4. Radiation: Omni
5. SMA cable pull force 10Kg, after crimping the cable and connector cannot rotate
5. Must test the product's voltage standing wave ratio (VSWR) consistency
6. Marking dimensions are key control dimensions
7. Product surface must be free of paper, dirt, scratches, damage, oil, etc.
8. This part must comply with environmental management substances in accordance with the system files QW-QA-10

天线杆	/	铜材/黑色	1PCS
PVC贴纸	/	单面贴纸	1PCS
吸盘底座	/	内含单圈磁铁	1PCS
CABLE	91001-B174-0002	RG-174 CABLE, Black, 50Ω	2000mm
SMA直头内螺内针	SMS-09G012RH-001	D1/金色	1PCS
PARTNAME	PART No	DESCRIPTION	Q' TY

客户料号				/			
TOLERANCES UNLESS OTHERWISE SPECIFIED				COCENTRA® 科信成精密技术 (江苏) 有限公司 COCENTRA PRECISION TECHNOLOGY (JIANGSU) Co. LTD.			
X.	/	X.°	±2°	SERIES:		TITLE:	
.X	±0.30	.X°	±1°	CCT-XP-20030		CCT-XP-20030	
.XX	±0.20	.XX°	±0.5°	APPD:		PART No.:	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PRIOR WRITTEN CONSENT OF COCENTRA PRECISION TECHNOLOGY (JIANGSU) Co. LTD. AND SHALL NOT BE REPRODUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF COCENTRA PRECISION TECHNOLOGY (JIANGSU) Co. LTD.				CKD:		DWG No.:	
				DR:			
UNITS		MAT'L	FINISH	SCALE	SHEET	REV.	
MM		N/A	N/A	1:1	1/1	X1	